


### PRODUCT DESCRIPTION

- » Particularly suited for mounting gate assemblies and the fittings E 20004
- » Wrench sizes with tight tolerances
- » Thin-walled, for working even in the tightest spaces
- » Bi-hexagon with anti-slip drive profile

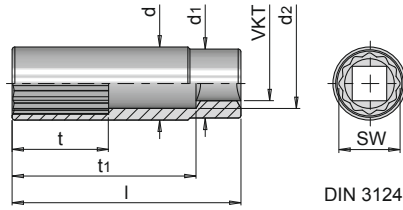

### MATERIAL

- » Chrome vanadium steel, nickel-chrome plated and thus chip-proof

d	d1	d2	l	t	t1	VKT <sup>1)</sup>	SW	No.	EUR
16.5	16.5	11	50	12	41.3	6,3 mm / 1/4"	12	V 34414/1/4/12	<>
21.2	22.7	14	83	35	64.9	12,5 mm / 1/2"	15	V 34414/1/2/15	<>
24	23.7	16	83	35	64.3	12,5 mm / 1/2"	17	V 34414/1/2/17	<>
26.2	25	18	83	35	66.7	12,5 mm / 1/2"	19	V 34414/1/2/19	<>
32	30	21	83	35	66.1	12,5 mm / 1/2"	24	V 34414/1/2/24	<>

1) VKT: Square drive