




PRODUCT DESCRIPTION

- » For determining the zero point of a workpiece
- » Equally suitable for determining hole centres and reference edges
- » Dustproof and watertight
- » Predetermined ceramic breaking point on the probe to prevent damage

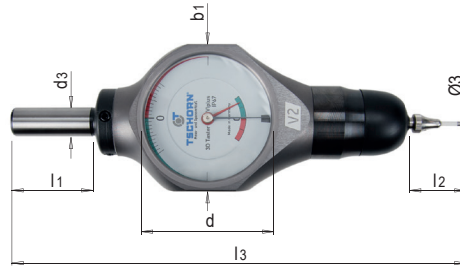

INCLUDED IN THE DELIVERY

- » Certificate of calibration

l1	l2	l3	b1	Wt.	SK ¹⁾	d3	d	No.	EUR
30	25	156	45	336 g	0-50-0	12	35	MKT 20206/12/35	<>
30	25	176	55	420 g	0-50-0	12	50	MKT 20206/12/50	<>

1) SK: dial